

Series 2, wall-mounted cooker hood, 90 cm, Stainless steel DWB96BC50



Optional accessories

DHZ1225 Chimney extension 1000 mm, DHZ1235 Chimney extension 1500 mm, DHZ9550 Brushed steel back panel, DHZ9551 Brushed steel back panel, DWZ0XX0J0 Long Life recirculation kit, DWZ1DX1B4 Clean Air Standard odor filter (repl.), DWZ1DX1I4 Clean Air Standard recirculation kit, DWZ1DX1I6 Clean Air Plus recirculation kit, DWZ1FX5C6 Clean Air Plus recirc. kit external, DWZ1FX5D1 Long Life recirculation kit external, DZZ0XX0P0 Long Life odor filter (replacement), DZZ1XX1B6 Clean Air Plus odor filter (replacement), HEZG9AS00S Adapter

Box-design hood: performance and matching kitchen design bundled in one hood.

- **Grease filtration level:** filters out over 85% of the grease from kitchen air

Technical Data

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130 cm
Height of the chimney:	583-912/583-1022 mm
Height of the appliance:	53 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Net weight:	13.0 kg
Type of control:	mechanical
Number of speed settings:	3
Maximum output air extraction:	619 m ³ /h
Maximum output recirculating air:	422 m ³ /h
Maximum Air flow:	619 m ³ /h
Number of lights:	2
Noise level:	70 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005036097
Connection rating:	220 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Installation typology:	Wall-mounted



4 242005 036097

Series 2, wall-mounted cooker hood, 90 cm, Stainless steel DWB96BC50

Box-design hood: performance and matching kitchen design bundled in one hood.

Operating and power:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A++ to E)
- Extraction rate exhaust air according to EN 61591 max. 619 m³/h
- Maximum extraction rate exhaust air 619 m³/h according to EN 61591
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
 - Max. normal use: 422m³/h
- Noise level in recirculation mode:
 - Max. normal use: 74 dB(A) re 1 pW
- 3 speeds

Design:

- Wall mounted hood, Type of appliance width: 90 cm
- 2 x 1,5W LED

Comfort:

- Metal grease filter, dishwasher safe
- 3 speeds via Push buttons


Environment and safety:

- Twin channel high performance fan motor

Installation and accessories:


- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Return flap is included

**Series 2, wall-mounted cooker hood,
90 cm, Stainless steel
DWB96BC50**

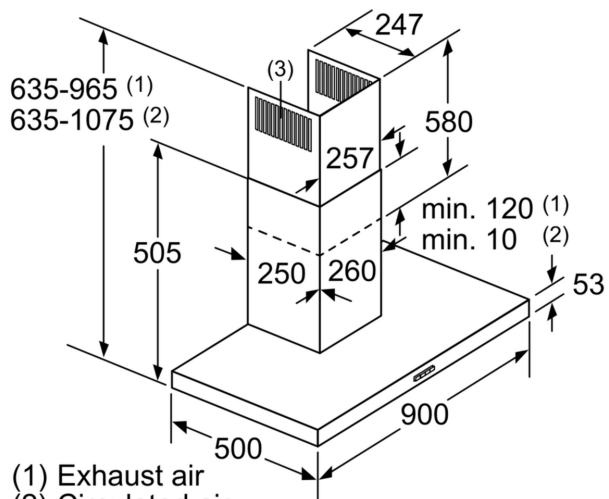

- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air to be mounted facing down


measurements in mm

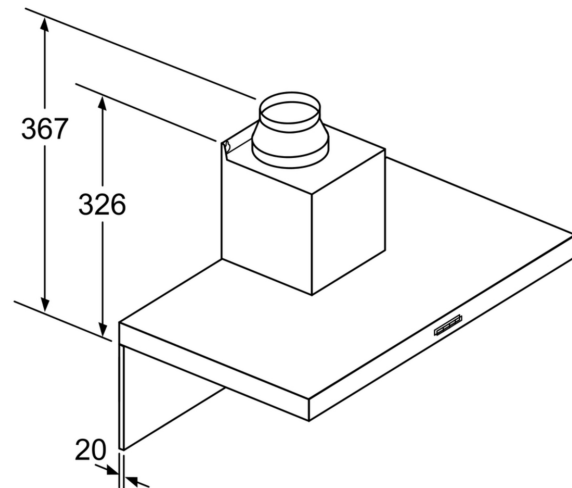

If a back panel is used, the design of the appliance must be considered.

measurements in mm

Measurements in mm

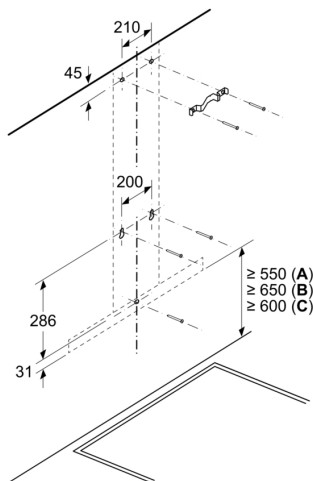


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

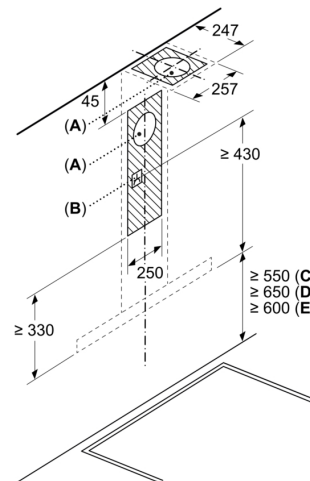

A: Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand