

Series 6, ceiling cooker hood, 90 cm, Stainless steel DRC97AQ50



Optional accessories

DIZ0JC2D0	Long Life recirc. kit external white
DIZ0JC5D0	Long Life recirc. kit external inox
DIZ1JC2C6	Clean Air Plus recirc.kit external white
DIZ1JC5C6	Clean Air Plus recirc. kit external inox
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
HEZG9AS00S	Adapter

The integrated ceiling ventilation: the space-saving solution for perfect installation in open kitchen directly into the ceiling.

- **Auto Control** enables you to control your Wi-Fi-synced hood and hob at the touch of a button.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **Cooktop-based Hood Control:** convenient operation of the hood via your hob.
- **Home Connect:** control your hood via the app.
- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.

Technical Data

Typology:	Island/Ceiling
Length electrical supply cord:	130 cm
Required niche size for installation (HxWxD):	... 299mm x 888.0mm x 487mm mm
Net weight:	19.5 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Maximum output air extraction:	459 m³/h
Boost position output recirculating:	565.0 m³/h
Maximum output recirculating air:	422 m³/h
Boost position air extraction:	798 m³/h
Number of lights:	4
Noise level:	56 dB(A) re 1pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable stainless steel
Odour filter:	No
Optional accessories:	DIZ0JC2D0, DIZ0JC5D0, DIZ1JC2C6, DIZ1JC5C6, DZZ0XX0P0, DZZ1XX1B6, HEZG9AS00S
Type of lamps used:	Not applicable
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection rating:	174 W
Voltage:	220-240 V
Frequency:	50; 60 Hz
Installation typology:	Island
Material body:	Stainless steel
Dimensions of the product, with chimney (if exists) (in):	... x x
Dimensions of the packed product:	23.22 x 40.55 x 24.40
Net weight:	43.000 lbs
Gross weight:	66.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	130 cm
Dimensions of the product, with chimney (if exists):	.x 900.0 x 500.0 mm
Dimensions of the packed product (HxWxD):	... 590 x 1030 x 620 mm
Net weight:	19.5 kg
Gross weight:	29.9 kg



4 242005 103973

Series 6, ceiling cooker hood, 90 cm, Stainless steel DRC97AQ50

**The integrated ceiling ventilation: the
space-saving solution for perfect
installation in open kitchen directly into
the ceiling.**

Operating and power:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A++ to E)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 458m³/h
- Intensive 798 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air: Max. normal use: 56 dB(A) re 1 pW, intensive: 68 dB dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
- Max. normal use: 422m³/h
- Intensive: 565m³/h
- Noise level in recirculation mode with Clean Air Plus odor filter :
- Max. normal use: 63dB(A) re 1 pW
- Intensive: 69dB(A) re 1 pW
- 3 speeds plus 2 intensive
- Automatic 10 minutes after running
- Electronic controls via remote control
- Controlling options: remote control, cooktop, Smart Device
- Automatic revert

Design:

- 4 x 3W LED
- SoftLight
- Light dimmer function
- Brushless motor for quiet and efficient operation

Comfort:


- Metal grease filter, dishwasher safe
- Saturation indicator for metal and charcoal filter
- RimVentilation
- Home Connect: Remote Monitoring and Control with Wi-Fi connectivity for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- interval function: available via Home Connect
- silence function: available via Home Connect

Installation and accessories:

- Ceiling mounted hood, Type of appliance width: 90 cm
- Suitable for ducted or re-circulated extraction
- For recirculated extraction CleanAir recirculating kit (accessory) needed
- Turnable blower, air outlet on all four sides possible


**Series 6, ceiling cooker hood, 90 cm,
Stainless steel
DRC97AQ50**

The fan outlet can be turned
in all four directions

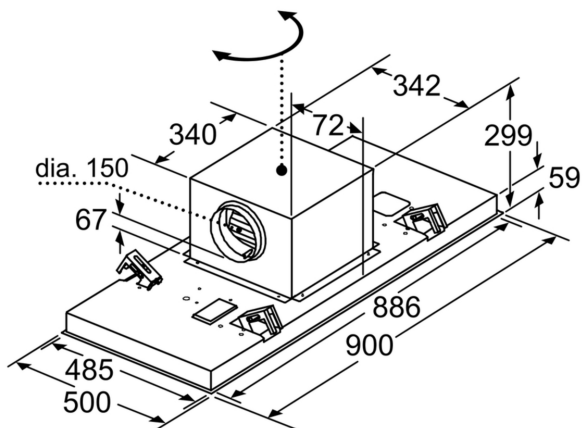


measurements in mm

measurements in mm
Air extraction

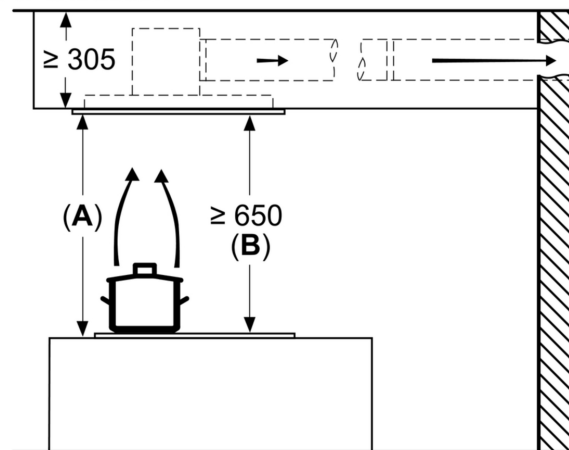


A: Optimum performance 700-1500
B: From upper edge of pan support

measurements in mm
Air recirculation

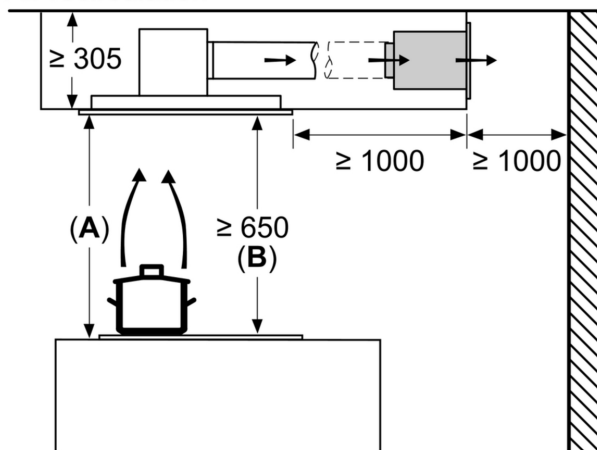


A: Optimum performance 700-1500
B: From upper edge of pan support

measurements in mm
Air recirculation

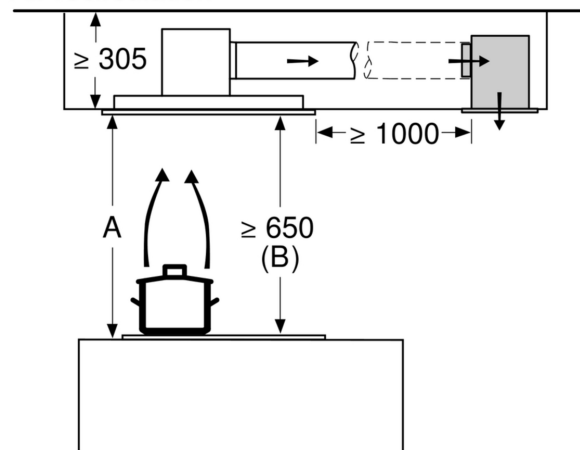

A: Optimum performance 700-1500
B: From upper edge of pan support

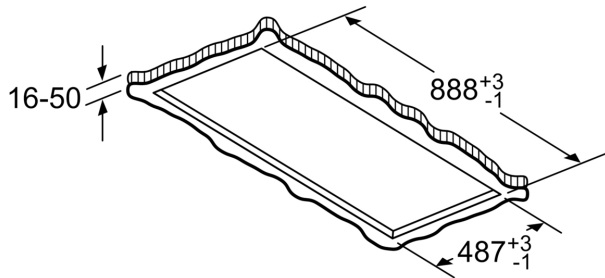

Never fit directly onto plasterboard or similar lightweight construction materials of the suspended ceiling. A suitable substructure is required that is securely fixed to the concrete ceiling.

measurements in mm