

Series 6, built-under fridge with freezer section, 82 x 59.8 cm, soft close flat hinge KUL22ADD0



Compact built-under fridge with 4-star freezer section for freshness throughout: climate-controlled area, easy access and Door Alarm.

- **Made in Germany:** high quality standards and thorough testing for enduring satisfaction.
- **Safety glass shelves:** safe storage thanks to particularly stable and shatterproof shelves.
- **Cools new food placed inside faster, thus protecting already cooled food.**
- **Noise Class B (30-35 dB):** enjoy the quietness for a relaxed home atmosphere.
- **Keep your groceries in perfect view.**

Technical Data

Gross weight:	75.000 lbs
Energy Efficiency Class (Regulation (EU) 2017/1369):	D
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369:	119 kWh/annum
Sum of volume of frozen compartments (EU 2017/1369):	17 l
Sum of volume of chill- and unfrozen compartments (EU 2017/1369):	93 l
Airborne acoustical noise emissions (EU 2017/1369):	.35 dB(A) re 1 pW
Airborne acoustical noise emission class (EU 2017/1369):	B
Built-in / Free-standing:	Built-in
Number of compressors:	1
Number of independent cooling systems:	1
Width of the appliance:	598 mm
Height:	820 mm
Depth of the product:	548 mm
Net weight:	31.1 kg
Required niche size for installation (HxWxD):	820x600x550 mm
Door panel options:	Not possible
Door hinge:	Right reversible
Shelves for Bottles:	Yes
Interior ventilator:	No
Reversible Door Hinge:	Yes
Length electrical supply cord:	230 cm
Multi-Flow Air Tower:	No
Economy setting:	Yes
Fast cooling switch:	Yes
Temperature Controlled Drawer:	No
Humidity Control Drawer:	No
Number of Door Bins - Refrigerator:	3
Door bin adjustability - Refrigerator:	Yes
Tilt-out door bins in fridge:	No
Gallon Storage:	Yes
Number of Gallon storage:	1
Motorized Shelf:	No
Material of the shelves:	Glas
Door opened indicator freezer:	No
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Storage Period in Event of Power Failure (h):	9 h
Door panel options:	Not possible
Installation typology:	Full-integrated
Dimensions of the packed product:	35.03 x 25.78 x 24.60
Net weight:	69.000 lbs

**Series 6, built-under fridge with
freezer section, 82 x 59.8 cm, soft
close flat hinge
KUL22ADD0**

- ice cube tray

**Compact built-under fridge with 4-star
freezer section for freshness throughout:
climate-controlled area, easy access and
Door Alarm.**

Performance and consumption

- Energy Class EU19_EEK_D: D
- Annual Energy Consumption: EU19_Annual energy cons rd_D: 119 kWh/a
- Total Volume : 110 l
- Noise level: EU19_Noise emission_D: 35 dB
- Fast freeze facility: yes

Design

- Build-under refrigerator
- SoftStart LED light

Comfort and Safety

- Display: LED electronic temperature control
- Optical and acoustic door open warning system
- Economy setting
- Home Connect: Remote Monitoring and Control with Wi-Fi connectivity
- Supercool function
- Automatic defrost in fridge section
- Easy clean interior

Fridge Section

- EU19_Unfrozen volume_D: 93 l
- 3 door bins
- Bottle holder in x-deep door tray
- Bottle rack: 1 2-wave bottle rack, plastic

Freshness System

Freezer Section

- Net Freezer Volume:
- EU19_Frozen volume_D: 17 l
- Freezing capacity 24h: EU19_Freezing capa. in 24h_D: 3 kg
- Temperature rise time : 9 H
- Ice compartment suited for Pizzas

Technical Information

- Climate class: EU19_Climate class_D: SN-T
- Door right hinged, reversible hinging
- built under, fully integrated
- Ventilation in plinth, no cut-out in the worksurface necessary
- Length of power cord: 230 cm

Dimensions


- Niche Dimension (H x W x D): 82.0 cm x 60.0 cm x 55.0 cm
- Dimensions (H x W x D): 82.0 cm x 59.8 cm x 54.8 cm

Accessories

**Series 6, built-under fridge with
freezer section, 82 x 59.8 cm, soft
close flat hinge
KUL22ADD0**

measurements in mm


Recommended gap dimensions for flat hinges




F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

Measurements in mm

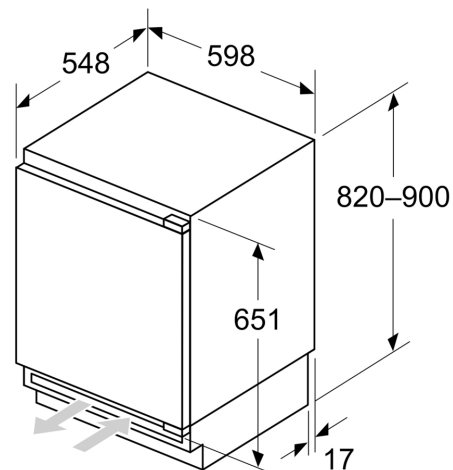

Measurements in mm




A: Substructure height

B: ≥ 560 mm (recommended)


Space for electrical connection next to the appliance on the left or right side

Measurements in mm

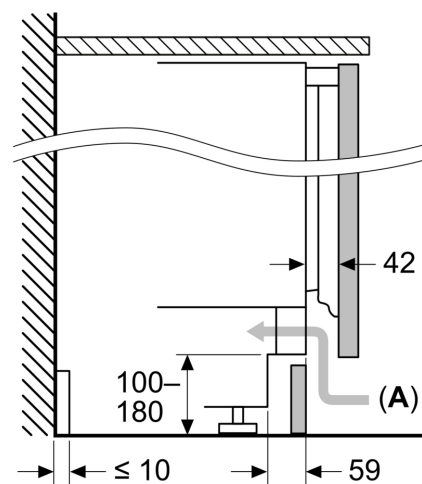

A: Air inlet ≥ 200 cm²

Maximal permissible weight of the unit fronts

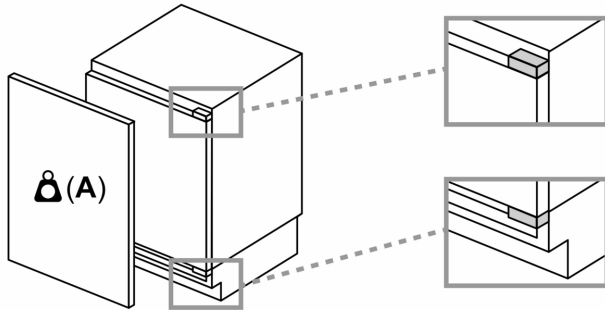

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

A: Weight ≤ 12 kg