

Series 4, built-in fridge-freezer with freezer at bottom, 193.5 x 55.8 cm, flat hinge KIN96VFD0



The large built-in fridge freezer with 12% more cooling volume including VitaFresh XXL <0°C> system, No Frost and error warning signal for optimal storage.

- **Built-in XL:** get 11 %extra volume of storage thanks to a taller design. ¹
- **No Frost:** you'll never have to defrost your freezer again.
- **2 Cooling Systems:** separately controllable refrigerator and freezer compartments
- **Door Open Alarm:** reminds you if the door is not closed properly.
- **Safety glass shelves:** safe storage thanks to particularly stable and shatterproof shelves.

Technical Data

Energy Efficiency Class (Regulation (EU) 2017/1369):	 D
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369:	 184 kWh/annum
Sum of volume of frozen compartments (EU 2017/1369):	 75 l
Sum of volume of chill- and unfrozen compartments (EU 2017/1369):	 215 l
Airborne acoustical noise emissions (EU 2017/1369):	 34 dB(A) re 1 pW
Airborne acoustical noise emission class (EU 2017/1369):	 B
Built-in / Free-standing:	 Built-in
Number of compressors:	 1
Number of independent cooling systems:	 2
Width of the appliance:	 558 mm
Height:	 1935 mm
Depth of the product:	 548 mm
Net weight:	 62.1 kg
Required niche size for installation (HxWxD):	 1940x560x550 mm
Door panel options:	 Not possible
Door hinge:	 Right reversible
Number of Adjustable Shelves in fridge compartment:	 3
Shelves for Bottles:	 Yes
Frost free system:	 Fridge and freezer
Interior ventilator:	 No
Reversible Door Hinge:	 Yes
Length electrical supply cord:	 230 cm
Multi-Flow Air Tower:	 No
Fast cooling switch:	 Yes
:	 Yes
Temperature Controlled Drawer:	 No
Humidity Control Drawer:	 No
Number of Door Bins - Refrigerator:	 4
Door bin adjustability - Refrigerator:	 Yes
Tilt-out door bins in fridge:	 Yes
Gallon Storage:	 Yes
Number of Gallon storage:	 1
Motorized Shelf:	 No
Material of the shelves:	 Safety glass
Door opened indicator freezer:	 No
Automatic motor-driven ice-maker:	 No
Fuse protection:	 10 A
Voltage:	 220-240 V
Frequency:	 50 Hz
Storage Period in Event of Power Failure (h):	 11 h
Door panel options:	 Not possible
Energy Star Qualified:	 No
Dimensions of the packed product:	 79.52 x 24.40 x 24.80
Net weight:	 137.000 lbs
Gross weight:	 147.000 lbs

¹ Comparison between an XL fridge-freezer combination (KIN96xxx) and a standard-sized model (KIN86xxx).



**Series 4, built-in fridge-freezer with
freezer at bottom, 193.5 x 55.8 cm,
flat hinge
KIN96VFD0**

**The large built-in fridge freezer with 12%
more cooling volume including VitaFresh
XXL <0°C> system, No Frost and error
warning signal for optimal storage.**

Performance and consumption

- Energy Class EU19_EEK_D: D
- Total Volume : 290 l
- Annual Energy Consumption: EU19_Annual energy cons rd_D: 184 kWh/a
- Climate class: EU19_Climate class_D: SN-ST
- Noise level: EU19_Noise emission_D: 34 dB

Design

- LED interior light in fridge section

Comfort and Safety

- NoFrost - no more defrosting!
- Optical and acoustic door open warning system
- Display: Separate, electronic temperature control, LED indicators
- Supercool function
- Two Cooling Systems
- easy Installation

Fridge Section

- EU19_Unfrozen volume_D: 215 l
- 5 safety glass shelves, of which 3 are height adjustable
- 1 door shelf large, 3 door shelf small
- Bottle rack: Bottle grid

Freshness System

- VitaFresh

Freezer Section

- Net Freezer Volume:
- EU19_Frozen volume_D: 75 l
- Freezing capacity 24h: EU19_Freezing capa. in 24h_D: 8 kg
- Temperature rise time : 11 H
- Fast freeze facility: yes
- SuperFreeze with automatic deactivation
- 3 transparent freezer drawers

Dimensions

- Dimensions (H x W x D): 193.5 cm x 55.8 cm x 54.8 cm
- Niche Dimension (H x W x D): 194.0 cm x 56.0 cm x 55.0 cm



Technical Information

- Door right hinged, reversible hinging
- Nominal voltage: 220 - 240 V
- Length of power cord: 230 cm

Accessories


- 1 x ice cube tray

Series 4, built-in fridge-freezer with freezer at bottom, 193.5 x 55.8 cm, flat hinge KIN96VFD0

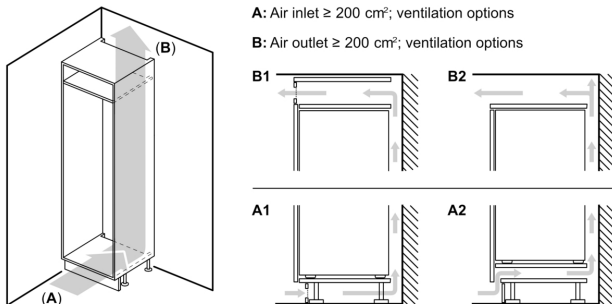

A	B	C	D
1500-1750	22	22	
720-1400	19	19	
A1	15	19	B+5 / C+5
A2	15	19	


Measurements in mm

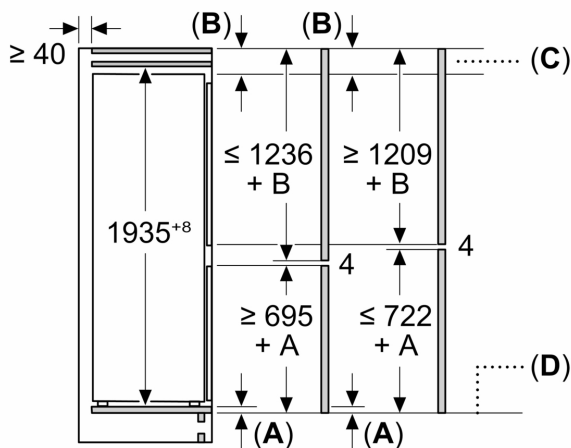


C: Front panel overhang

D: Lower edge of front panel

Measurements in mm

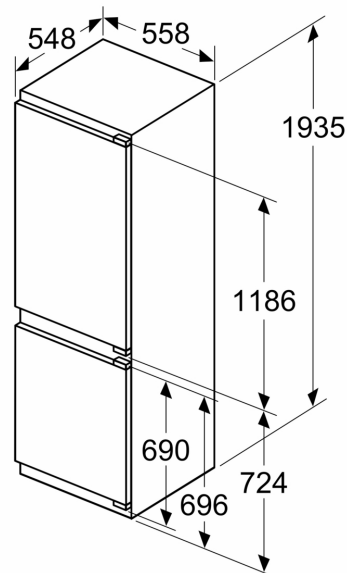


Measurements in mm

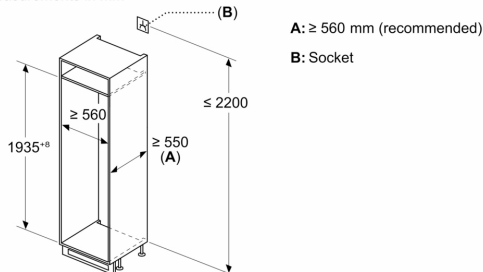

measurements in mm

Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units. ↓